DWG. NO. 260-910-0630G

REV	DESCRIPTION	BY DATE	APPD
G	ER14665	PSM 04/01/09	DCam

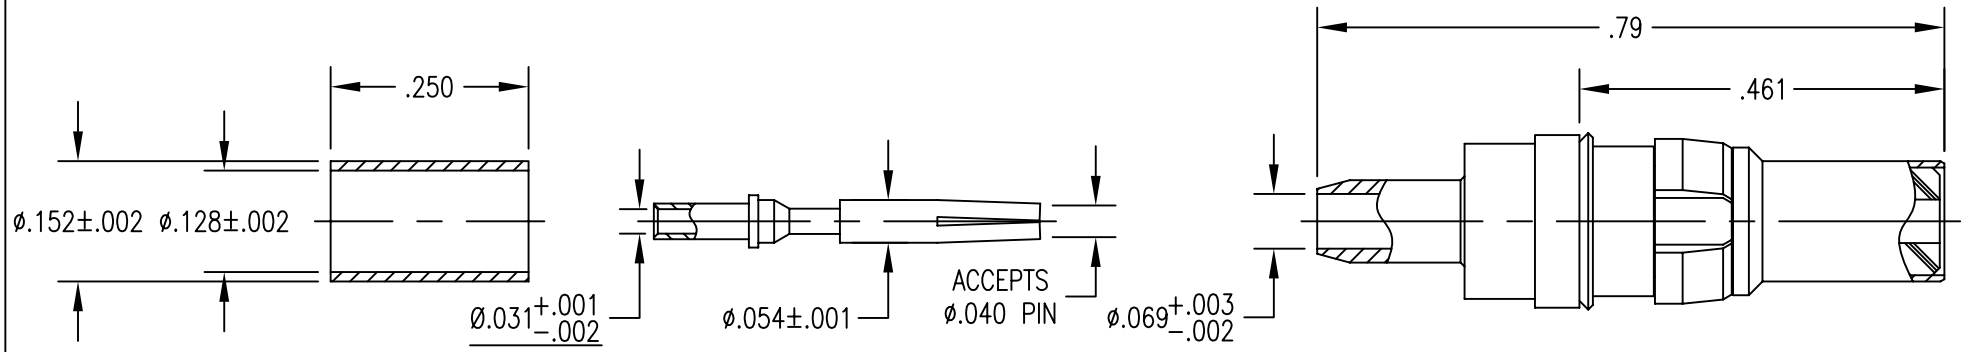

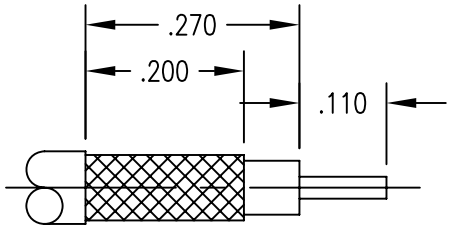

TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:
   BODY AND FERRULE: BRASS PER ASTM B16
   CONTACT: BERYLLIUM COPPER PER ASTM B196
   INSULATOR: TEFLON PER ASTM D1710
   SPRING WASHER: PHOSPHOR BRONZE PER ASTM B103
2. FINISH:
   BODY AND FERRULE: .000030 MIN. GOLD PER MIL-G-45204
   OVER .000050 MIN. NICKEL PER QQ-N-290
   FERRULE AND SPRING WASHER: .000005 MIN. GOLD PER MIL-G-45204
   OVER .000050 MIN. NICKEL PER QQ-N-290
   CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER COPPER FLASH
3. FOR ASSEMBLY USE CAP 9-07 WITH ABOVE TRIM DIMENSIONS.
4. DESIGNED FOR USE WITH RG 316/U, 174, 188, WHITMOR W-2033-1882 AND EQUIVALENT CABLES.

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES OR MM
TOLERANCES: MM
DECIMALS .XX ± .01/0.254
.XXX ± .005/0.127
ANGLES ± 2°
SCALE: 4:1

KINGS by WINCHESTER ELECTRONICS

Winchester Electronics
62 Barnes Industrial
Road North
Wallingford, CT 06492

CUSTOMER DRAWING

TITLE: 50 OHM RDM CRIMP/CRIMP PLUG WITH CAPTIVE CENTER CONTACT

DRAWN	DATE	CHECKED	DATE
KJT	7/10/97	JMC	7/10/97
APPROVED	DATE	APPROVED	DATE
AT	7/10/97	AT	7/10/97

A	260-910-0630G	SHT. 1 OF 1	REV. G